1602

POWERCOM AUDIO UNIT. SIMPLEBUS

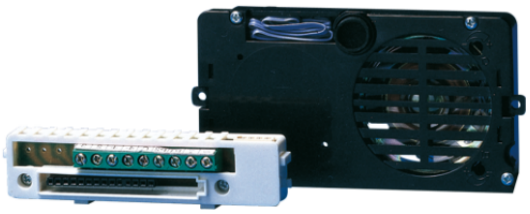

SIMPLEBUS1

Audio speaker unit for Simplebus system with terminal board and double amplifier, watertight loudspeaker and electret microphone, Both, microphone and loudspeaker volumes, can be adjusted from the front. Complete with microprocessor and DIP SWITCH with 8 positions for programming the calls to the users. 12 V AC power supply (use Art. 1395/A). Electronic door-opening function on board (3A). To be inserted in modules Art. 3320/0, ù3320/1 and 3320/2. Dimensions: 102X55X35 mm. From the RI27 it is compatible with all Simplebus 2 functions and products. It allows call addressing for up to 120000 users.

1602

POWERCOM AUDIO UNIT. SIMPLEBUS

GENERAL DATA	
Height (mm)	55

COMPATIBLE SYSTEMS	
Comelbus system	Yes

ENVIRONMENTAL AND COMPLIANCE FEATURES	
Operating temperature (°C)	-25 ÷ 55

GENERAL FEATURES	
Maximum current absorption (mA)	200
Simplebus 2 audio system	Yes
Simplebus 2 audio/video system	Yes

The technical specifications are subject to change without prior notice.