




Product Image

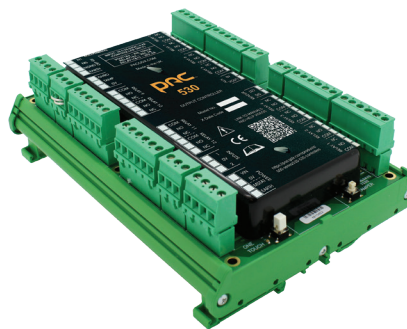

Part Number

909020052 – PAC 530 Output Controller - DIN Mount

909020050 – Boxed PAC 530 Output Controller

Dimensions

W 180 x H 125 x D 40mm

W 150 x H 220 x D 40mm

Operating Temperature

-10°C to +55°C

Operating Humidity

0% to 85% Relative Humidity

Controller Outputs

- 12 configurable outputs:
- Latched, Momentary, Toggled and Pulsed
 - 10 x 2Amp Relays @ 30 V DC
 - 2 x 8Amp Relays @ 30 V DC

Controller Inputs

- 2 configurable inputs:
- Normally Open, Normally Closed and 2, 3 or 4 state
 - 5Amp Relays @ 30 V DC

Additional Connections

- 1 x tamper alarm input
- 1 x override input
- 1 x RS-485 input

Auxiliary power outputs

- 1 x Polyfused 200mAmp Auxiliary voltage output

Configuration

via PC with PAC Access Central software

Connection to PAC 512

RS-485

Maximum Distance to PAC512

1000m

Power input

10.5 – 28 V DC:
115mA @ 10.5 V DC
45mA @ 28 V DC

Warranty

5 years against electronic failure

Standards Compliance

CE, RoHS & WEEE compliant



Date of print/release: (September 2020)

This document is provided by STANLEY Security or its affiliates ("STANLEY") for general information purposes only. STANLEY warrant the accuracy of the data as at the date of print/release, but it may be subject to change after such date. STANLEY will not be responsible for any loss or damage that may arise from reliance thereof. Copyright © STANLEY Security 2020. PAC, GDX and 3xLOGIC are the trade marks of STANLEY Security, Stanley Black & Decker, Inc., or their affiliates.

Ordering Information:

PAC Access Control, 1 Park Gate Close,
Bredbury, Stockport, Cheshire, SK6 2SZ
customerservices@pacgdx.com | +44 (0) 161 406 3400
www.pacgdx.com